



Catalogue
CATERING
Chapter
COOKING

Model
M-E915BM 380-415V 3N 50/60Hz

19020378

14/12/2018

ELECTRIC BOILING PAN INDIRECT HEAT, AUTOMATIC REFILL, M-E915 BM
Boiling pans are ideal to cook, simmer or stew different types of food in large quantities and volume.

Indirect heat boiling pans or bain marie pans are specially suitable to simmer, poach or braise products that do not require continuous stirring or a high cooking temperature.

2 mm stainless AISI-304 steel top with rounded edges for easy cleaning.

Laser cut and automatic welding for a perfect adjustment of sides between modules with square angle finish.

The pan is integrated in the top by robotic welding. It is made of AISI-304 stainless steel and the bottom is made of stainless steel AISI-316L. Side walls with satin polished, for easy cleaning.

150 litre capacity model.

Indirect gas heating by means of bain marie jacket around the pan.

Heating by shielded electrical resistances under the bain marie chamber.

"The water in the jacket is heated and the saturated steam produced at "

110 °C evenly heats the bottom and side walls of the pan.

Heating control by means of power regulator and pressure switch.

Bain marie jacket with automatic refill system.

Four safety systems for automatic jacket level control:

_pressure switch for jacket pressure control

_overpressure safety valve

_jacket thermostat to prevent overheating

_top embedded pressure gauge

The pan can be filled with cold or warm water by means of electro valves activated by a single switch at the front panel.

2" pan discharge safety tap with thermal insulator handle easy to operate without any effort.

Easy to remove, robust and reliable AISI-304 stainless steel discharge filter.

Double side lid, balance by hinge and front handle for diagonal opening at 75° that allows the lid to remain open at any position.

Perfect adjustment of the lid to reduce cooking time and save energy.

Led indicator for connected and working equipment.

Water-tight and protecting-support controls.

High temperature protector for the chimney made of enamelled cast iron.

Front access to components.


According to European standards for components and panels temperature, efficiencies and combustion, and sanitary regulations (EN-60335 and EN-203)

EN-203)

EN-203)

IPX5 grade water protection equipment.

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	850 mm	Z Gross height	1125 mm
Net Weight	138,0 kg	Gross Weight	150,0 kg
Net volume	0,691 m3	Gross volume	0,966 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	22,000 kW
Heating power	22,00 kW
Voltage	380-415V - 3N
Amperage	40A
Electric frequency	50/60Hz

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
----------	-------------------------



Catalogue
CATERING



Chapter
COOKING

Model
M-E915BM 380-415V 3N 50/60Hz


19020378

14/12/2018

M-E910 BM

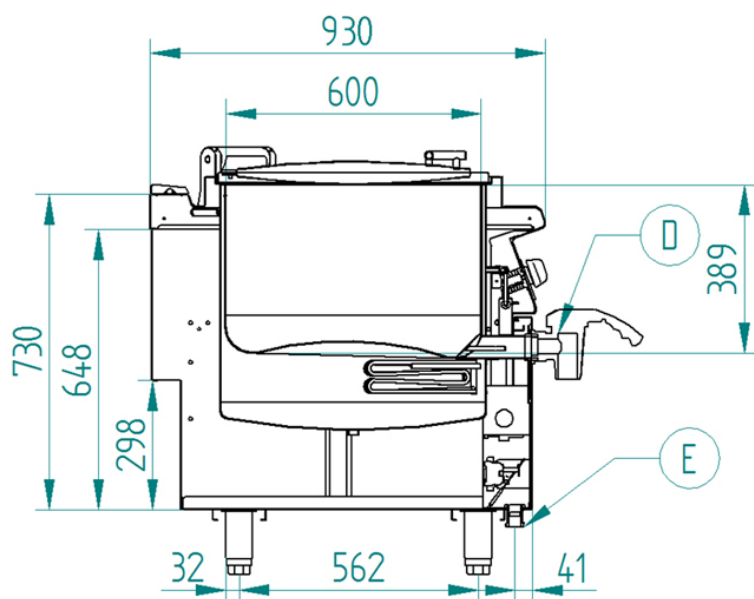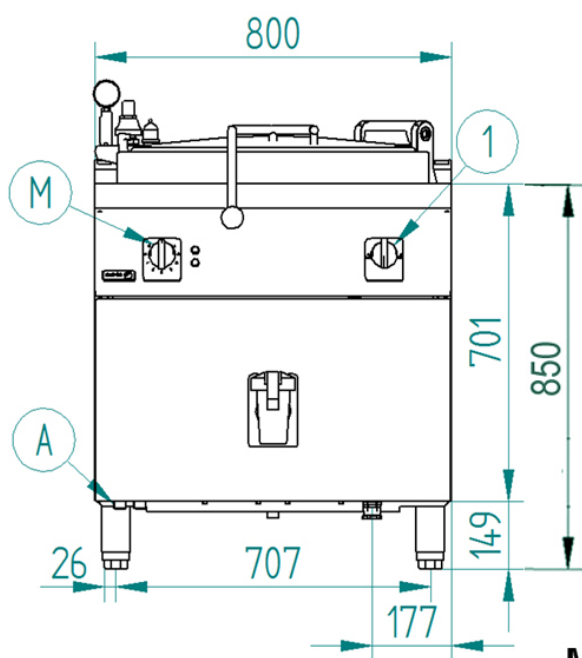

M-E915 BM

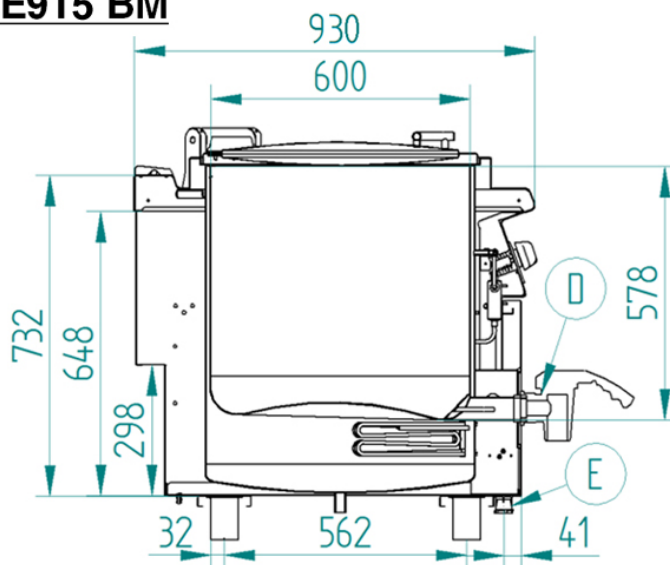

- | | |
|------------------------|-----------------------|
| M – Mando eléctrico | Electric control |
| E – Conexión eléctrica | Electrical connection |
| D – Desagüe | Drainage |
| 1 – Mando agua | Water control |